




HD 7/16-4 Cage Classic

Cold water high-pressure cleaner designed for long run times.



1 Durable and reliable

- 4-pole electric motor.
- Brass cylinder head and ceramic piston.

2 Robust and secure

- Robust tubular frame construction ensures optimum protection of the machine.
- Built-in handles for transport.

3 Service-friendly

- Excellent access to all relevant components.
- Large water inlet filter for easy servicing.

4 Versatile

- The machine can be attached to the floor or the wall.
- Practical trigger gun storage with auto off function (Total Stop optional).



HD 7/16-4 Cage Classic

- Durable crankshaft pump with ceramic-coated pistons
- Trigger gun storage with automatic machine switch-off
- Wall mounting possible

Technical data

Order Number	1.367-314.0	
EAN code	4039784952799	
Current type	Ph / V / Hz	3 / 400 / 50
Flow Rate	l/h	400 - 700
Operating pressure	bar / MPa	70 - 160 / 7 - 16
Max. Pressure	bar	220
Max. water feed temperature	°C	60
Power rating	kW	4,3
number of simultaneous users		1
Weight	kg	55
Dimensions (L x W x H)	mm	625 x 500 x 360

Equipment

Trigger gun		Standard
High-pressure hose	m	10 / ID 8, 315 bar
Spray lance	mm	100
Power nozzle		■
ANTI!Twist		-
Pressure switch control		-
Servo Control		-
Crankshaft pump with ceramic pistons		■
■ Included in delivery.		

HD 7/16-4 CAGE CLASSIC

1.367-314.0

KÄRCHER



		Order Number	ID	Max. working pressure	Length	Price	Description	
Standard with unions on both sides								
High-pressure hose, 30 m DN 8, including rotary coupling	1	6.390-293.0	ID 8	315 bar	30 m		With rotary coupling, 2 x M 22 x 1.5	▲
	2	9.751-087.0						■
High-pressure hose packaged	3	6.391-342.0	ID 8	315 bar	10 m		To extend the operating radius with the high-pressure cleaner. Connection on both sides M22 x 1.5.	□
Longlife 400 with unions on both sides								
High-pressure hose Longlife 400, 15 m, DN 8, including rotary coupling	4	6.389-709.0	ID 8	400 bar	15 m		With rotary coupling, 2 x M 22 x 1.5	▲
High-pressure hose Longlife 400, 20 m, DN 8, extension	5	6.390-027.0	ID 8	400 bar	20 m		with rotary coupling, 2 x M 22 x 1.5	▲
High-pressure hose Longlife 400, 30 m DN 8, including rotary coupling	6	6.390-294.0	ID 8	400 bar	30 m		With rotary coupling, 2 x M 22 x 1.5	▲
High-pressure hose Longlife 400, ID 8, 400 bar, 1.5 m	7	6.392-282.0	ID 8	400 bar	1.5 m		Screw connections at both ends, M 22 x 1.5, with kink protection. Dual layer steel wire reinforced.	□
High-pressure hose 1.5 m, DN 8, including connectors	8	6.390-178.0	ID 8	400 bar	1.5 m		1.5 m high-pressure hose (DN 8, M 22 x 1.5) with kink protection and connectors at both ends. For connecting to hose reels with appropriate connector (M 22 x 1.5).	□
High-pressure hose Longlife 400, 10 m, DN 8, including rotary coupling	9	6.388-083.0	ID 8	400 bar	10 m		10 m high-pressure hose Longlife 400 (DN 8) with rotary coupling, two layer high-strength steel wire reinforced. Connectors at both ends. M 22 x 1.5, with kink protection.	□

■ Included in delivery. □ Available accessories. ▲ Extension hose.

HD 7/16-4 CAGE CLASSIC

1.367-314.0

KÄRCHER



		Order Number	Flow Rate					Price	Description	
Trigger guns										
Standard trigger gun	1	9.751-139.0							High-pressure gun for machines of the HD Classic range. With adapter for high-pressure hoses M 22 x 1.5.	■
EASY!Force Advanced	2	4.118-005.0							Effortless, not energy-sapping: the EASY!Force high-pressure gun uses the recoil force of the high-pressure jet to reduce the holding force for the operator to zero.	□
Conversion kit 2 from device	3	4.111-051.0							Provides all the parts required to utilise our EASY!Force technology even on our non-Easy!Force machines. Including adaptors, lance, Easy!Force trigger gun and hose.	□
Quick connect										
Quick coupling	4	6.401-458.0							For quick change of different spray lances and accessories. Optimum adaption to Kärcher accessories, especially for connection between trigger gun and spray lance. With M22 x 1.5 female.	□
Plug nipple	5	6.401-459.0							Hardened stainless steel nipple for quick coupling 6.401-458. With M22 x 1.5 male.	□

■ Included in delivery. □ Available accessories. ▲ Extension hose.

HD 7/16-4 CAGE CLASSIC

1.367-314.0



		Order Number	Nozzle size				Price	Description	
Power nozzle spray angle 25°									
Power Nozzle	1	2.883-397.0	40					Fan jet nozzle with 25° spray angle, suitable for large areas and removing stubborn dirt and stains.	■
HP nozzle spray angle 0°									
Power Nozzle	2	2.884-533.0	40					High-pressure nozzle with powerful jet for extremely stubborn dirt.	□
Power nozzle spray angle 15°									
Power Nozzle	3	2.883-388.0	40					Fan jet nozzle with 15° spray angle suitable for stubborn dirt.	□
Power nozzle spray angle 40°									
Power Nozzle	4	2.884-522.0	40					Power nozzle with a 40° spray angle and fan jet, suitable for large areas and sensitive surfaces.	□

■ Included in delivery. □ Available accessories. ▲ Extension hose.

HD 7/16-4 CAGE CLASSIC
1.367-314.0



		Order Number					Price	Description	
Trigger guns	1	4.775-026.0							■

■ Included in delivery. □ Available accessories. ▲ Extension hose.

HD 7/16-4 CAGE CLASSIC

1.367-314.0

KÄRCHER


		Order Number	Max. working pressure	Length			Price	Description	
Rotating spray lances									
Rotatable lance, 600 mm, ergonomic	1	4.760-664.0	300 bar	600 mm				600 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Lance 850 mm, rotatable, ergonomic	2	4.760-663.0	300 bar	840 mm				850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
1050 mm lance, rotatable, ergonomic	3	4.760-660.0	300 bar	1050 mm				1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Lance 1550 mm, rotatable, ergonomic	4	4.760-661.0	300 bar	1550 mm				1550 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Lance 2050 mm, rotatable, ergonomic	5	4.760-662.0	300 bar	2050 mm				2050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance									
Lance 250 mm, non-rotatable	6	4.760-667.0		250 mm				250 mm stainless steel lance. With manual coupling. Non-rotatable.	☐
550 mm lance, non-rotatable	7	4.760-665.0		550 mm				550 mm stainless steel lance. With manual coupling. Non-rotatable.	☐
Jet pipe for replacement 600mm	8	9.751-140.0							☐
Angular spray lance									
WC and gutter lance	9	4.760-073.0						Stainless steel lance WC and gutter with nozzle insert. Specially shaped for effective and hygienic cleaning of gutters and toilets.	☐
Flexible spray lance									
Flexible lance 1050 mm	10	6.394-654.0	210 bar	1050 mm				1050 mm flexible lance with variable bend from 20° to 140°, ideal for cleaning difficult to reach areas, e.g. gutters.	☐
Articulated joint M18x1,5	11	4.481-039.0	300 bar					High-pressure articulated joint: Thanks to infinite angle adjustment up to 120°, this tool is ideal to effortlessly clean hard-to-reach areas. Simply attach to the spray lance of the pressure washer.	☐
Telescopic spray lance									
Telescopic jet pipe	12	6.394-690.0	225 bar	5400 mm				Can be continuously extended from 1.8 to 5.4 m. For cleaning areas that are difficult to reach, such as ceilings or facades. With integrated HD trigger gun, M 22 x 1.5 connection with rotary coupling. Connection for M 18 x 1.5 nozzles.	☐
Restraint belt for telescopic jet pipe	13	6.373-987.0						Convenient strap for relief when working with the telescopic spray lance (6.394-690). The burden is optimally distributed on the body and longer periods of use are possible.	☐
Gutter cleaner									
Gutter cleaning lance	14	2.642-305.0						The lance is suited for cleaning of gutter systems. Because of the shape of the lance and the special nozzle the gutter can be cleaned without removing the cover plates.	☐
Undercarriage spray lance									
Underbody lance	15	4.760-245.0		700 mm				Stainless steel lance for effective and easy underbody and wheel arch cleaning. Without high-pressure nozzle.	☐

■ Included in delivery. □ Available accessories. ▲ Extension hose.

HD 7/16-4 CAGE CLASSIC

1.367-314.0

KÄRCHER



		Order Number	Max. working pressure	Nozzle size			Price	Description	
Dirt Blaster, small									
Dirt Blaster Nozzle	1	4.767-231.0	180 bar	40					☐
Dirt blaster, large									
Dirt Blaster Nozzle	2	4.763-252.0	300 bar	40				The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C.	☐
Triple nozzles									
Triple Nozzle	3	4.767-150.0	300 bar	40				Triple nozzle with manual nozzle changeover. Convenient spray adjustment. For high-pressure cleaners with injector; low-pressure fan jet for detergent removal and application. Connector M 18x1.5.	☐

■ Included in delivery. □ Available accessories. ▲ Extension hose.

HD 7/16-4 CAGE CLASSIC

1.367-314.0

KÄRCHER


		Order Number	Max. working pressure	Nozzle size	Diameter		Price	Description	
Pipe cleaning hose, ID 6									
Hose assembly TR pipe cleaning DN6 max.2	1	6.110-046.0	250 bar					The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	☐
Pipe cleaning hose	2	6.390-028.0	120 bar					20 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle).	☐
Pipe cleaning hose, DN 6, 20 m, 220 bar	3	6.110-008.0	250 bar					20 m flexible high-pressure hose (DN 6) for cleaning pipes up to 220 bar (threaded connection for R 1/8 nozzle).	☐
Pipe cleaning hose, DN 6, 30 m	4	6.390-029.0	120 bar					30 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle).	☐
Hose assembly TR pipe cleaning DN6 max.2	5	6.110-047.0	250 bar					The 30 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	☐
Pipe cleaning hose, DN 6, 20 m, 220 bar	6	6.390-030.0	250 bar					20 m flexible high-pressure hose (DN 6) for cleaning pipes up to 220 bar (threaded connection for R 1/8 nozzle).	☐
Pipe cleaning nozzle									
Dirt blaster pipe cleaning D21/040	7	4.765-001.0		40	21 mm			The forward-tilted rotating pencil jet removes the most stubborn dirt. The three backwards-tilted jets ensure the necessary forward movement, as well as convenient handling.	☐
Dirt blaster pipe cleaning D30/040	8	4.765-004.0		40	30 mm				☐
Pipe cleaning nozzle	9	5.763-015.0		55	16 mm			16 mm pipe cleaning nozzle with internal thread. Various jet directions for environmentally-friendly cleaning of blocked drains and pipes.	☐
	10	5.763-016.0		60	16 mm				☐
	11	5.763-017.0		50	30 mm			30 mm pipe cleaning nozzle with internal thread. Various jet directions for environmentally-friendly cleaning of blocked drains and pipes.	☐
Rotating pipe cleaning nozzle	12	6.415-428.0		50	16 mm			Rotating pipe cleaning nozzle with internal thread and four rotating jets for environmentally-friendly cleaning of blocked drains and pipes.	☐

■ Included in delivery. □ Available accessories. ▲ Extension hose.

HD 7/16-4 CAGE CLASSIC

1.367-314.0

KÄRCHER



		Order Number	Flow Rate	Nozzle size	Diameter	Price	Description	
Hard surface cleaner FR Classic								
	1	2.643-476.0						☐
Hard Surface Cleaner FRV 30								
FRV 30	2	2.642-999.0					With the integrated and automatic suction of the dirty water, the FRV 30 makes surface cleaning even more efficient. Machine specific nozzle kit must be ordered separately.	☐
Add-on kit rubber lip	3	2.642-910.0					For smooth floors indoors. The squeegee increases the suction performance of the FRV 30 and minimises the amount of water remaining. This means the floor is dry in just a few minutes.	☐
Extension hose 5 m	4	4.440-939.0					5m extension hose for FRV 30. Connection sleeve included.	☐
Add-on kit hose attachment	5	2.642-528.0					Suction cup for fixing the suction hose to smooth surfaces.	☐
Add-on kit dirt trap	6	2.642-532.0					Galvanised steel bucket for collecting coarse dirt and for fixing the suction hose in outside areas.	☐
Hard surface cleaner FR 30								
Surface Cleaner FR 30	7	2.642-997.0			300 mm		Up to 10 times greater area coverage compared with the conventional high pressure jet.	☐
Hard surface cleaner FR 30 ME								
FR 30 ME surface cleaner	8	2.640-355.0			300 mm		Hot water resistant stainless steel surface cleaner with double ceramic bearings, non-marking swivel castors and suction hose connection. Ideal for indoor cleaning, e.g. food industry.	☐
Hard Surface Cleaner FR 50								
FR 50 surface cleaner	9	2.640-679.0			500 mm		Hot water resistant stainless steel surface cleaner with 500 mm working width. Ideal for large areas. With double ceramic bearings, push handle, non-marking swivel castors and detergent dosing system.	☐
Machine-specific nozzle kit for FR								
Nozzle kit for surface cleaners (type-specific) 650 - 850 l/h	10	2.639-187.0	650 - 850 l/h				Nozzle kit includes power nozzles and unions. For Kärcher surface cleaners (650 to 850 l/h).	☐
Machine-specific nozzle kits for FRV								
Nozzle kit 040 - for FRV	11	2.642-431.0		40			Machine-specific nozzle kit Kärcher power nozzles and jet nozzle for FRV 30.	☐
Machine-specific nozzle kits for FR Classic								
Nozzle kit for FR Classic 040	12	2.885-312.0		40			Nozzle kit specifically for FR Classic surface cleaner.	☐
Hard surface cleaner FRV 30 Me								
FRV 30 ME	13	2.642-911.0					Surface cleaner with integrated waste water pick-up	☐
Extension hose FRV 30 Me and FRV 50 Me	14	4.441-040.0					5 m extension hose for FRV 30 Me. Includes connecting adapter.	☐

■ Included in delivery. □ Available accessories. ▲ Extension hose.

HD 7/16-4 CAGE CLASSIC

1.367-314.0

KÄRCHER



		Order Number	Flow Rate				Price	Description	
Cup foam lance									
Foam lance nozzle Ø1,5	1	6.394-969.0							☐
Inno Foam Set									
Inno foam kit with detergent injector	2	2.640-151.0						High-pressure foam system with double lance (foam nozzle and high-pressure jet for rinsing). For use with mobile and stationary high-pressure and HDS pressure cleaners for cleaning or disinfection.	☐
Easy Foam Set									
Easy Foam Set with RM injector	3	2.640-691.0						HP foam system for use with. HD/HDS units for cleaning and disinfecting. Foam nozzle for connection to lance and HP chemical injector with precision 0-5% metering valve. The machine specific nozzle kit has to be ordered separately.	☐
Nozzle kits for Inno/Easy Foam Set									
Nozzle kit 090 Inno/Easy kit 700 - 1000 l/h	4	2.640-688.0	700 - 1000 l/h					Nozzle kit contains Kärcher power nozzles and nozzle inserts. For Inno/Easy-Foam set 700-1000 l/h. For optimal foam system performance.	☐
Foam nozzle mounting kit									
Foam nozzle kit	5	2.637-926.0						Foaming agent kit. The foam nozzle is ideal for use in sanitary areas and the food industry and wherever long application times are necessary.	☐

■ Included in delivery. □ Available accessories. ▲ Extension hose.

HD 7/16-4 CAGE CLASSIC

1.367-314.0

KÄRCHER


		Order Number						Price	Description	
HP detergent injector										
Detergent injector for high pressure	1	3.637-170.0							Cleaning agent dosage at high pressure 3 - 5 %	☐
Detergent injector for high and low pressure (without nozzles)	2	3.637-001.0							Detergent injector for independent high and low pressure dosage. Maximum dosage about 15%.	☐
Machine-specific nozzle kit with order no. 3.637-170										
Nozzle insert trapezoidal thread HDS-GER	3	4.769-011.0							For HD/HDS 750 - 1000 l/h. Consists of nozzle insert + HP power nozzle + union	☐
Machine-specific nozzle kit with order no. 3.637-170.0 750-1000 l/h	4	4.769-047.0								☐
Nozzle insert with order no. 3.637-001										
Nozzle insert for Order No. 3.637-001, high-pressure for machines up to 1100 l/h.	5	4.769-003.0							Nozzle insert for detergent injector 3.637-001 for high-pressure detergent application. For high-pressure cleaners with a water flow rate up to 1100 l/h.	☐
Low pressure for units rated up to 1100 l/h	6	4.769-001.0							For low pressure with machines up to 1.100 l/h	☐
Rotary coupling										
Rotary coupling	7	4.401-091.0							Kärcher rotary coupling prevents twisting and kinking of high-pressure hoses for ease of use. Connector M 22 x 1.5 m. With grip protection.	☐
Coupling										
Coupler -2xM22x1,5	8	4.403-002.0							Brass double connector for connecting and extending high-pressure hoses. With rubber protection. Connector: 2x M 22 x 1.5 m.	☐
Connector										
Nozzle connector/screw connector	9	4.402-022.0							Nozzle connector/screw connector for connecting high-pressure nozzles and accessories to the high-pressure trigger gun (with nozzle connector). Connectors: 1x M 22 x 1.5 and 1x M 18 x 1.5.	☐
Y distributor	10	4.405-048.0							Offers the option to connect two spray units to the machine. Installation on the high pressure outlet.	☐
Adapter										
Adapter M22 - Swivel	11	4.424-004.0							M22 x 1,5female and swivel connection. For extension of high-pressure hoses with AVS connection or for usage of the telescopic lance with a high-pressure hose with AVS connection.	☐
Adapter EASY!Lock										
Adapter 1 M22AG-TR22AG	12	4.111-029.0							Adapter 1 to connect the old hose with the new hose	☐
Adapter 2 M22IG-TR22AG	13	4.111-030.0							Adapter 2 to connect the old device with the new hose and the old gun with the new hose	☐
Adapter 3 M22IG-TR22AG	14	4.111-031.0							Adapter 3 to connect the old gun with the new spray lance and new servo regulator	☐
Adapter 5 TR22IG-M22AG	15	4.111-033.0							Adapter 5 to connect the new gun with the old spray lance and new servo regulator with the old spray lance	☐
Adapter 6 TR22IG-M22AG	16	4.111-034.0							Adapter 6 to connect the new device with the old hose and the old hose with the new gun	☐
Adapter 7 M18IG-TR20AG	17	4.111-035.0							Adapter 7 to connect the old spray lance with the new nozzle	☐
Adapter 8 TR20IG-M18AG	18	4.111-036.0							Adapter 8 to connect the new spray lance with the old nozzle	☐

■ Included in delivery. □ Available accessories. ▲ Extension hose.

HD 7/16-4 CAGE CLASSIC

1.367-314.0

KÄRCHER



		Order Number	Length				Price	Description	
Automatic, self-winding hose reels									
Add-on kit hose reel TR 40m	1	6.392-442.0	40 m					Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses. Compatible high-pressure hose, e.g. order no. 6.110-076.0 (ID 8, 40 m, 400 bar, 1x hose reel connection attachment kit).	☐
Swivel holder	2	2.639-931.0						Swivel holder for automatic hose reel wall mounting. For maximum action radius and flexibility of high-pressure hose. Rotatable 120°. Galvanised steel.	☐
ABS wall fastening stainless steel	3	2.641-867.0						Swivelling wall bracket made of high-grade steel (for 2.641-866). This makes maximum flexibility and convenience possible when working with the HP hose.	☐

■ Included in delivery. □ Available accessories. ▲ Extension hose.

HD 7/16-4 CAGE CLASSIC

1.367-314.0

KÄRCHER




		Order Number	Nozzle size				Price	Description	
Wet blasting attachment (without nozzle)									
Wet blasting attachment with flow control (without nozzles)	1	4.762-010.0						Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet.	☐
Wet blasting attachment without flow control (nozzles not included)	2	4.762-022.0						Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet. Without flow control.	☐
Nozzle pack for wet blasting attachment									
Nozzle kit for wet blasting attachment 040	3	2.637-900.0	40					Nozzle kit with wet blasting nozzle and nozzle insert (type specific). For optimal Kärcher wet blasting attachment performance. Only in combination with wet blasting attachment 4.762-010/-022.	☐
Boron carbide nozzle									
Boron carbide nozzle, for machines as of 1000 l/h	4	6.415-084.0	6 mm					In addition to nozzle packs. Very wear-resistant nozzle with boron carbide chuck for continuous-duty operation.	☐

■ Included in delivery. □ Available accessories. ▲ Extension hose.

HD 7/16-4 CAGE CLASSIC

1.367-314.0

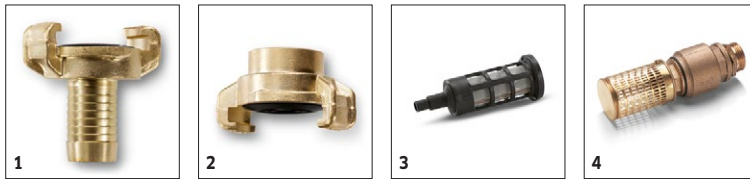

		Order Number			Price	De- scripti- on	
Geka coupling							
With hose nozzle, R 3/4"	1	6.388-455.0				with hose liner	☐
With female thread, R 3/4"	2	6.388-473.0				with female thread	☐
Suction filter							
Water filter	3	6.414-956.0				Suitable for ponds, storage tanks or similar, polyami- de filter casing, stainless steel strainer, 800 µm mesh, R 3/4" and R 1" con- nec- tion, without non- return valve	☐
Suction filter with check valve	4	4.730-012.0				Brass suction filter suitable for ponds, storage tanks, etc. With check valve.	☐

■ Included in delivery. ☐ Available accessories. ▲ Extension hose.

HD 7/16-4 CAGE CLASSIC

1.367-314.0

KÄRCHER



		Order Number			Price	Description	
Fine-mesh water filter							
Fine-mesh water filter with adapter	5	4.730-102.0				Fine-mesh water filter, 125 µm, max. temperature 50°C. Protects the high-pressure cleaner from dirt particles contained in the water. Water flow rate up to 1200 l/h. Connection 3/4", with adapter, 1".	☐
Water supply hose							
Water supply hose	6	4.440-038.0				NW 13 R1" / R 3/4", up to 30 °C	☐

■ Included in delivery. □ Available accessories. ▲ Extension hose.

HD 7/16-4 CAGE CLASSIC 1.367-314.0



		Order Number			Price	De- scripti- on	
Backflow check valve							
Backflow preventer	7	2.641-374.0				To pre-vent deter-gent getting into the drinking water cycle in case of inlet at low-pressu-re. - hot water resistant up to 80 °C - tes-ted accor-ding to IEC 60335-2-79 - integ-rated leakage protec-tion	☐

■ Included in delivery.
 ☐ Available accessories.
 ▲ Extension hose.

HD 7/16-4 CAGE CLASSIC

1.367-314.0

KÄRCHER



		Order Number	Flow Rate				Price	Description	
Push-on washing brush									
Push-on washing brush	1	4.762-497.0						With clamp for mounting directly to units' double or triple nozzle. Fits on new double and triple nozzles.	☐
Rotating washing brush									
Rotating wash brush for < 800 l/h machines, nylon bristles	2	4.762-561.0	500 - 800 l/h					The rotating wash brush gently removes fine dust and traffic film from all surfaces. Temperature resistant up to 60°C. (M 18 x 1.5, replaceable brush insert).	☐
Rotating wash brush for < 800 l/h machines, natural bristles	3	4.762-560.0	500 - 800 l/h					Driven by water stream. Gently removes fine dust and traffic film from any surface. Temperature resistant up to 60°C, M 18 x 1.5 (replaceable brush insert).	☐

■ Included in delivery. □ Available accessories. ▲ Extension hose.